

Multi-Pull

THE SYSTEM FOR SHOOTING

GROUND AUTOMATION



EP096AC-Timer



Characteristics:

The **EP096AC-Timer** is able to perform a countdown from the configured time (01-99 seconds) till 00. On the rear side panel (**Fig1**) there is a selector to switch between two different preconfigured times.

Operative function:

The stopwatch will start to countdown as soon as you push the start button on the remote.

When it will reach "05" seconds it will start to blink red to inform about the ending of the seconds.

When it reaches "00" it will blink red for 10 times.



(Fig1)

- S1 = Main Power Switch
- S2 = Configuration mode
- S3 = Configured time selection
- J1 = Power input
- J2 = Wired remote

The Remote (Fig2)

It has two buttons:

The top one has only the function to start the countdown

The bottom one has two functions:

- Push while the counting is on going to pause the count
- While in pause state, holding it down for two seconds will reset the timer.

The two buttons serves also to change the configurations in the setup page.

By moving the S2 selector you can enter the configuration menu.

While on the menu, one button will move the cursor, the other button is to change the option.


Setup page

The setup page has 5 options:

- Background color (BGcol)
- Text Color (FGcol)
- Time 1
- Time 2
- Luminosity

Note:

Besides the two time options, we suggest to not change the factory setup. The text and background color is the best with "white-on-black" and the luminosity is automatically changing by the sunlight sensor.

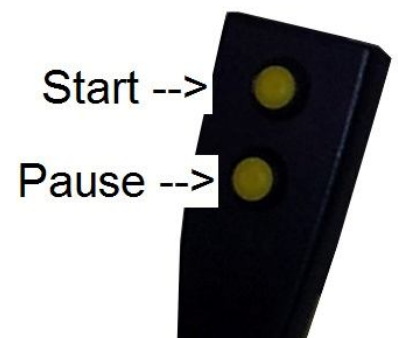

(Fig2)